# SUBMINIATURE HIGH POWER RELAY



## Features


- Max.2A switching capability
- High sensitive: 150mW
- 1 Form C configutation
- Plastic sealed type available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (12.5 x 7.5 x 10.3) mm

■ CONTACT DATA	
Contact Form	1C
Contact Material	Silver Alloy
Contact Ratings	2A 120AC/2A 24VDC
Max Switching Voltage	125VAC/60VDC
Max Switching Current	2A
Max Switching Power	240VA /48W
Contact Resistance	100MΩ(at 1A 6VDC)
Electrical Life	1X10 <sup>5</sup> Ops(30Ops/min)
Mechanical Life	1X10 <sup>7</sup> Ops(300Ops/min)

■ GENERAL DATA					
Insulation Resistance		100MΩ 500VDC			
Dielectric Strength	Between coil & contacts	1000VAC 1min			
	Between open contacts	400VAC 1min			
Operate Time		Max. 5ms			
Release Time		Max. 5ms			
Temperature Range		- 30℃ to +70℃			
Shock Resistance	Functional	98m/s² (10g)			
	Destructive	980m/s <sup>2</sup> (100g)			
Vibration Resistance		10 to 55Hz 1.5mm			
Humidity		35% to 85% RH			
Weight		Approx. 2.2g			
Safety Standard		CUL,CQC			


■ COIL DATA								
Nominal Voltage	Coil Resistance at 20 $^{\circ}$ C ± 10%( $\Omega$ )		Max Operate Voltage	Min Release Voltage	Max Applicate Voltage			
(VDC)	0.15W	0.20W	0.36W	(VDC)	(VDC)	(VDC)		
3	60	45	25	2.25	0.30	3.90		
5	167	125	70	3.75	0.50	6.50		
6	240	180	100	4.50	0.60	7.80		
9	540	405	225	6.75	0.90	11.70		
12	960	720	400	9.00	1.20	15.60		
24		2880	1600	18.00	2.40	31.20		

## ORDERING INFORMATION

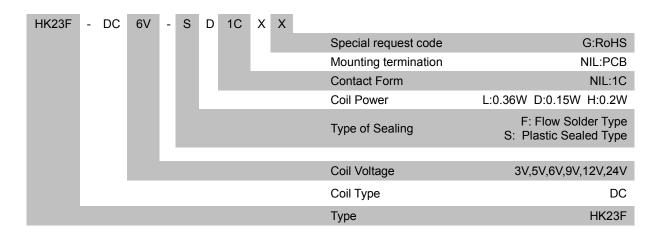

## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

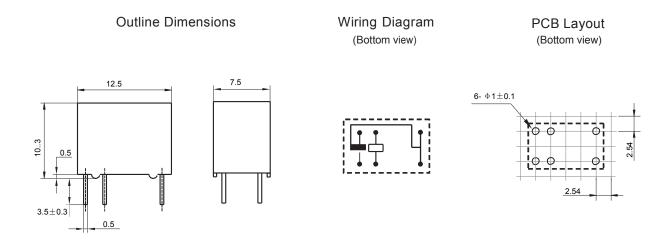


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.


2) The tolerance without indicating for PCB layout is always  $\pm 0.1$ mm.

## CHARACTERISTIC CURVES

#### MAXIMUM SWITCHING POWER



#### **ENDURANCE CURVE**



#### Notice

- 1) To avoid using relays under strong magnetic field which will change the parameters of relays such as pick-up voltage and drop-out voltage.
- 2) The relay may be damaged because of falling ot when shocking conditions exceed the requirement.
- 3) Regarding the plastic sealed relay, we should leave it cooling naturally untill below 40°C after welding, then clean it and deal with coating, remarkably the temperatute of solvents should also be controlled below 40°C. Please avoid cleaning the relay by ultrasonic, avoid using the solvents like gasoline, Freon, and so on, which would affect the configuration of relay or influence the environment.
- 4) About preferable condition of operation, storage and transportation, please refer to "Explanation to terminology and guiderines of relay".

### Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a tight position choose the suitable product for their own application. If there is any query, please contact Ever-way for the technical service. However, it is the user's responsibility to determine which product should be used only.